



Series 1306

Zetco AGA Approved
Gas Cock SAE Flare

FEATURES

MANUFACTURED IN ITALY

FULL BORE

AUSTRALIAN GAS ASSOCIATION APPROVAL #5301

45° SAE FLARE

BLOW-OUT PROOF STEM

MUST BE OPERATED IN FULLY OPEN OR CLOSED POSITION

ALL VALVES PRESSURE TESTED DURING PRODUCTION

SIZE RANGE: 8MM TO 20MM

PRESSURE AND TEMPERATURE RATINGS

TEMPERATURE RANGE: -20°C TO 99°C

MAXIMUM OPERATING PRESSURE AT NOMINAL TEMPERATURES:

FLUIDS 2500 kPa

FOR RATINGS AT SPECIFIC TEMPERATURES REFER TO GRAPH OVERLEAF

GAS 2100 kPa




AGA 5301
AS 4617

Series 1306

Zetco AGA Approved Gas Cock SAE Flare



DIMENSIONAL AND COMPONENT DIAGRAM

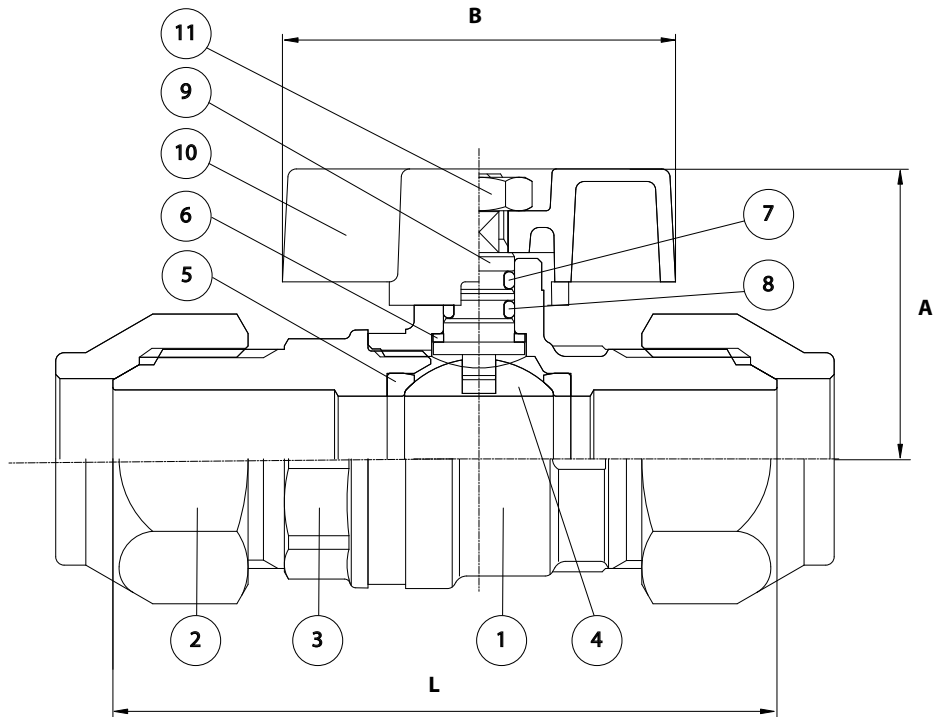

MATERIALS

POS.	PART NAME	MATERIALS
1	BODY	BRASS
2	NUT	BRASS
3	END ADAPTOR	BRASS
4	BALL	BRASS (CHROME PLATED)
5	SEAL	PTFE
6	THRUST WASHER	PTFE
7	UPPER O-RING	HNBR
8	LOWER O-RING	EPDM PEROXIDE
9	STEM	BRASS
10	HANDLE	POWDER COATED ALUMINIUM
11	NUT	ZINC PLATED STEEL

DIMENSIONS - mm

Prod. Code	Size	A	B	L	Kv	Wgt kg
1306008	8	31	47	62.9	11	0.175
1306010	10	31	47	66.5	11	0.180
1306015	15	31	47	67.5	11	0.205
1306020	20	35	47	88.6	20	0.458

PRESSURE/TEMPERATURE DIAGRAM

