



Series 1520

**Stainless Steel
Filter Basket
Nylon Thread**

DESCRIPTION

A stainless steel filter basket designed to be fitted to the inlet side of a non-return valve to form a foot valve which protects pumps and other equipment from the ingress of undesirable debris. Durable Nylon threads ensure that the filter can be easily installed and removed for cleaning and maintenance without deformation.

FEATURES

Design	<p>Used with a non-return valve to form a foot valve</p> <p>Stainless steel 304 basket for reliability and corrosion resistance</p> <p>Nylon threads for durability and resistance to deformation</p> <p>Prevents debris from entering pumps and suction equipment</p>
Production	Manufactured in Italy under ISO 9001 Quality Management System
Technical	<p>Male ISO 228/1 G threaded connection</p> <p>Mesh size: 2000 microns</p> <p>Temperature range: 0°C to 99°C</p>
Options & Variants	<p>Size range: DN10 (3/8") to DN100 (4")</p> <p>Series 1521 Stainless steel filter basket brass thread</p> <p>Series 4022 stainless steel filter basket</p>




Series 1520

Stainless Steel Filter Basket Nylon Thread



DIMENSIONAL AND COMPONENT DIAGRAM

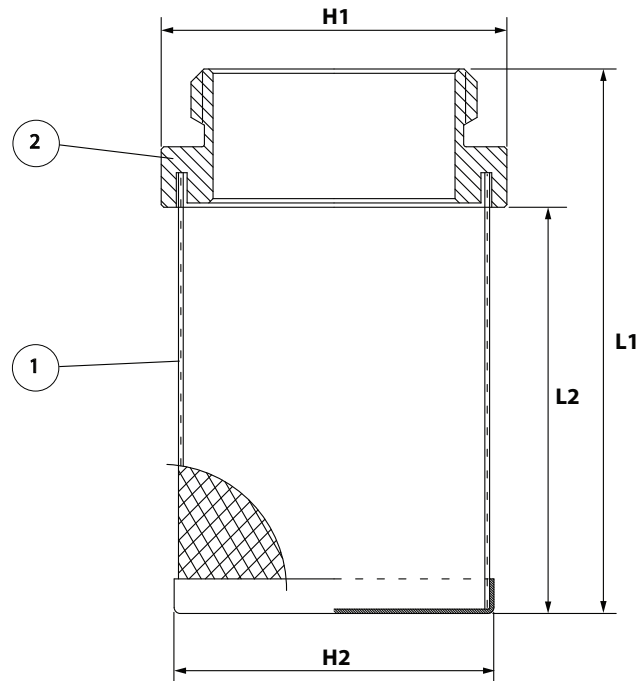

PARTS MATERIALS

POS.	PART	MATERIAL
1	MESH	STAINLESS STEEL 304
2	THREAD	NYLON

PARTS MATERIALS

Prod. Code	DN	Size - (mm)	H1	H2	L1	L2	Wgt Kg
1520010	10	3/8" - (9.5)	42	19	49	39	0.010
1520015	15	1/2" - (12.7)	47	23	47	33	0.010
1520020	20	3/4" - (19.0)	57	29	58.5	43	0.015
1520025	25	1" - (25.4)	69	37	70	52	0.020
1520032	32	1 1/4" - (31.7)	75	44	76.4	58	0.035
1520040	40	1 1/2" - (38.1)	83	50	82	63	0.040
1520050	50	2" - (50.8)	96	61.5	95	76	0.065
1520065	65	2 1/2" - (63.5)	123	80.5	98	73	0.100
1520080	80	3" - (76.2)	138	99	110	85	0.125
1520100	100	4" - (101.6)	152.5	116.5	128	101	0.280